

HAI YANG SHI YOU 923



For the additional information please contact:

MarketingDepartmentof **COSL Drilling**

Telephone: +86 -10 -8452 2511

Email: sh_cosldrillingmarket@cosl.com.cn

Website: www.cosl.com.cn

Office address:

No.201,Haiyou Street, Yanjiao Developing Zone,
Sanhe City, Hebei Province (Post Code: 065201)

**General Description**

Design/Generation	Friede&Goodman,/L-780 MOD II
Constructing Shipyard	Qingdao Shipyard, COOEC
Deliver Year/Upgrades	2011
Classification	ABS&CCS
Flag	China
Overall Dimensions	187.68ft L x 175ft W x 25ft D
Legs.....	3 X 308.39ft. long; Triangular
Usable leg below hull	259.183ft
Spudcan diameter	50ft
Draft at loadline (deepest).....	14.248ft
Displacement at loadline.....	9314mt
Drilling VL :.....	2232mt
Cantilever Envelope(Reach aft, from/to).....	0/40ft
Cantilever Envelope(Transverse, port stbd).....	12/12f
Operating Water Depth	200ft
Max. Rating Drilling Depth	20,000ft
Accommodation	120 beds

Drilling Equipment

Derrick	BAOJI HJJ450/47-T7, 992080.18 lbs static hook load
Simultaneous setback + hookload capacity	567mt
Drawworks	Baoji JC-70D drawworks / 2x1973.95hp
Top Drive	AKER MH /PTD-500-AC/ 1,150HP / 5,000psi
Rotary Table	Baoji ZP-375 Max. Opening 37-1/2"
Pipe Handling	N/A
Mud Pumps	3 x Baoji F-1600/ 1073HP / 5,000psi
Solid Control	4* Derrick FLC504 shale shakers 35.71bbl/min Each
Drilling Manifold	ChengDe KingDream 3-1/8" 10K Choke Baoji Tonghua 4" Standpipe Manifold Baoji 2" 10k cement Manifold

Power Plant

Main Power	4 x Henan Diesel /TBD620V16/ 2223.37HP Diesel Engines
Emergency Power	1 X Henan Diesel/TBD620V8 diesel engine rated 1072.8hp, 1,500 rpm

STORAGE CAPACITIES

Fuel Oil.....	2500 bbls
Active Liquid Mud.....	3,466bbls
Independent Brine.....	497 bbls
Independent Base Oil.....	N/A
Drill Water.....	5532 bbls
Potable Water.....	1855 bbls
Bentonite/barite.....	4876.42 ft3
Cement	4873.42 ft3
Sack Storage.....	3,400 sacks

BOP Equipment

Diverter	N/A
BOP annular	1 x Shaffer/ 5k 13-5/8
BOP rams	2xSichuan Oil Well Control/ 10k Double 13-5/8",
BOP handling	J.D.Neuhaus/EH30 2x30T safety working load

Cranes

Port&Stbd	2* YQHG2800-35T-18m (8T-39M; 124.67ft boom length, 35mt Max.load
Knuckle-Boom	N/A

Mooring Equipment



Anchor Winches	4* MEP Mepsh-MWE-030-090SD,electric,
Anchor Lines	4* MEP 35W*7-3B 1-1/2" Diameter 1968 useful length
Anchor	4* CMIC Delta Anchor, 2.8mt/each

OTHER FEATURES

Helideck	Designed for helicopter Sikorski S61 N Helicopter
Tension System	N/A

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals,policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

HAI YANG SHI YOU 923 (HYSY923)

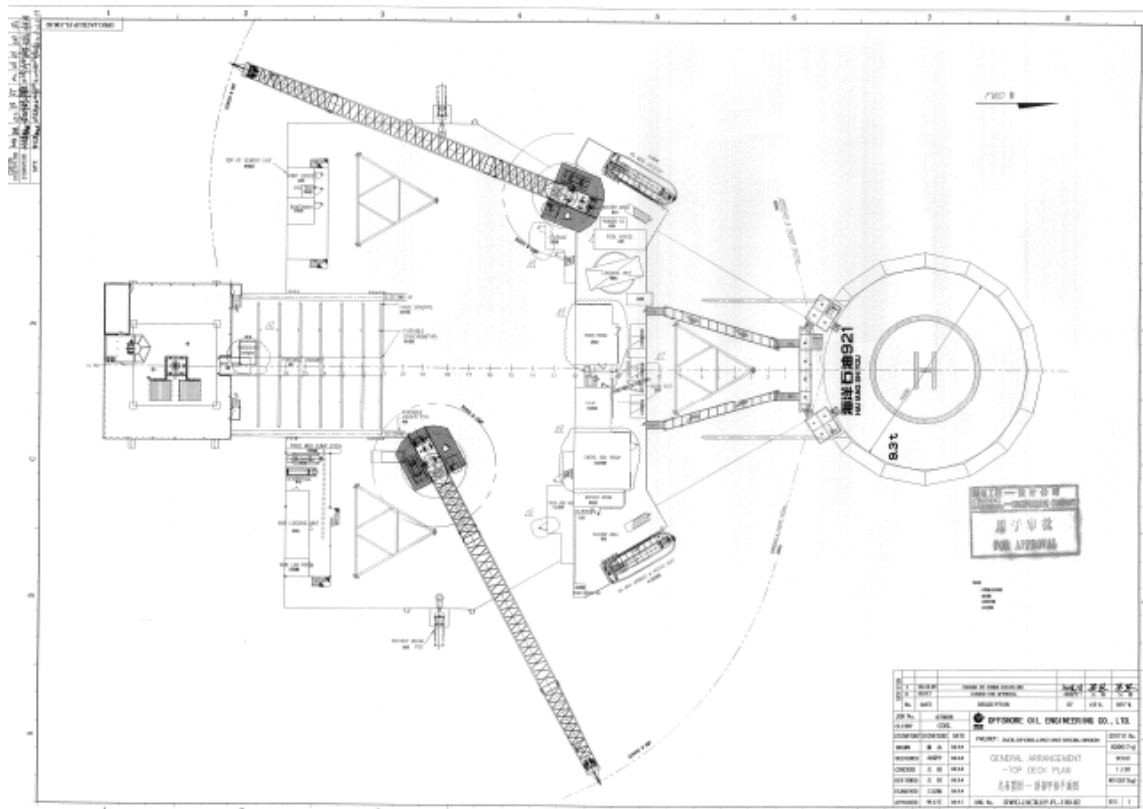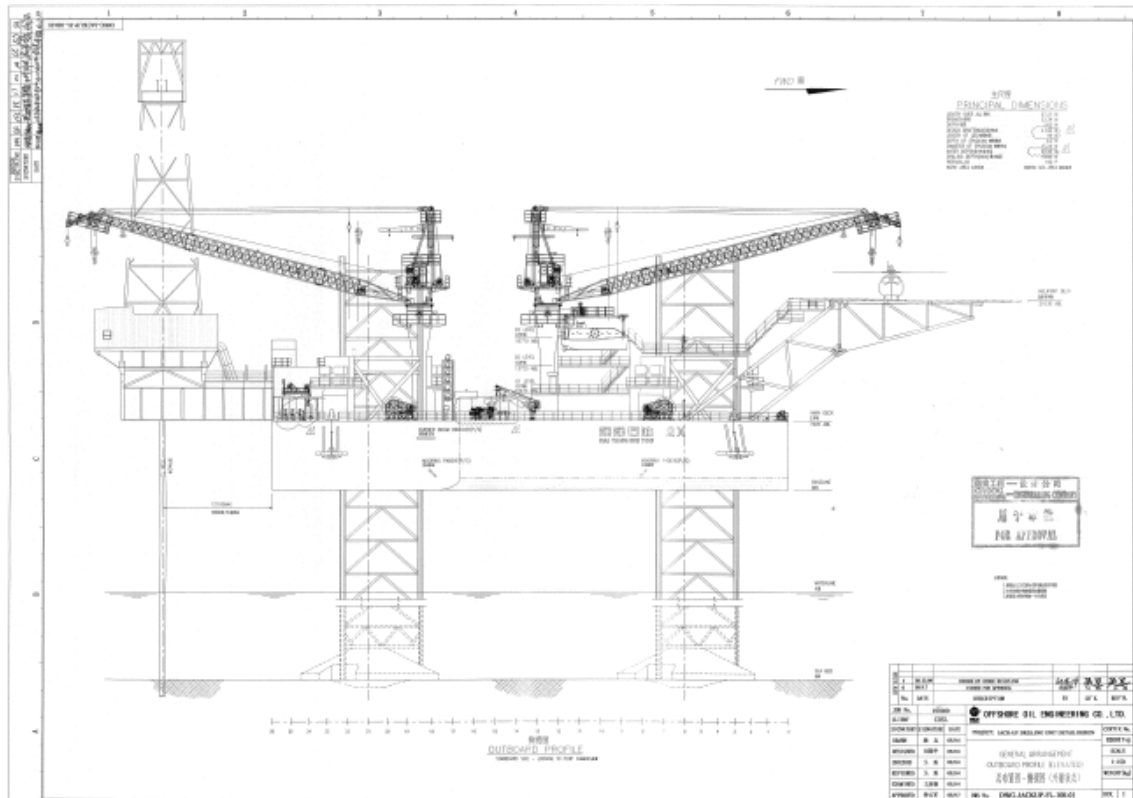

These specifications are intended for general reference purposes only. All equipment shall be operated and maintained at all times, in compliance with COSL DRILLING standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.